




# IRONWOOD

## CSS

### COMPUTER CARREL

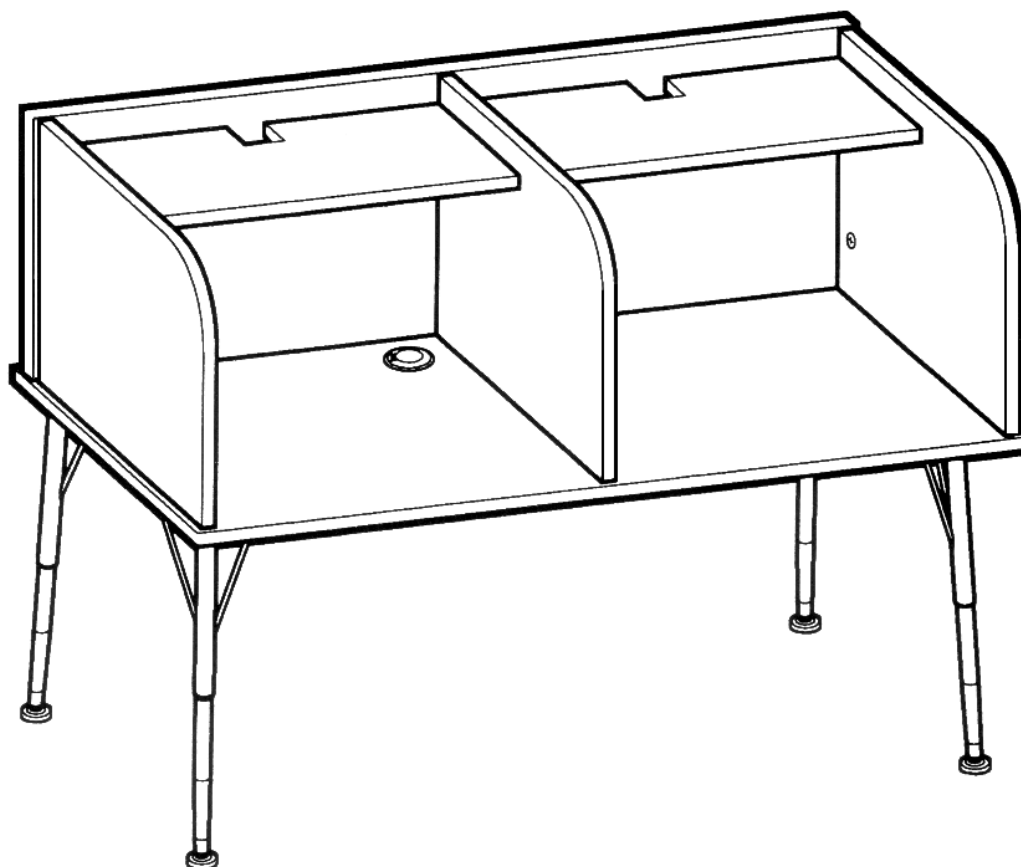

#### IMPORTANT!

Assembly may require the assistance of another person.

Before you begin assembly:

**READ THE DIRECTIONS** all the way through one time. This will speed up the process and help you understand the sequence of steps.

**COUNT THE PARTS AND HARDWARE** before assembly. This ensures you have received all necessary parts before you begin.


**TOOLS:** You may need a Phillips head screwdriver, a medium slotted screwdriver or a plastic mallet. To protect your new furniture from damage during assembly, it is recommended to work on a carpeted surface.

In the event any parts are missing from this package, send your name, address, telephone number, and a description of the missing part(s) to: **PARTS, Box 1420, Missoula, MT 59806** or call: **1-800-769-5693** or **FAX 1-800-445-5281**.


**CAUTION:** On assemblies requiring glue, make sure the unit is assembled correctly before gluing. Once this unit is assembled with glue, the manufacturer will not be responsible for damaged parts. Keep a damp cloth or sponge handy to wipe off excess glue.

To care for this furniture, simply wipe with a cloth dampened with glass cleaner containing ammonia-D.


PARTS DIAGRAM

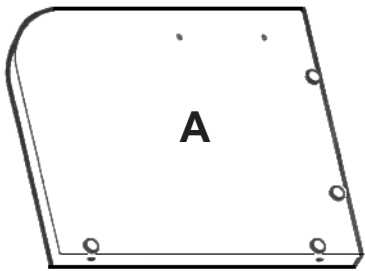


Left Side	06000141	1 ea.
-----------	----------	-------

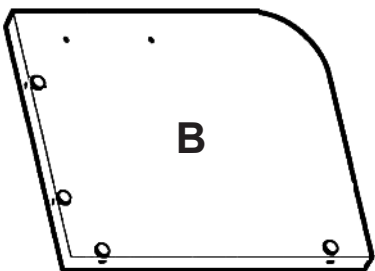


Right Side	06000141	1 ea.
------------	----------	-------

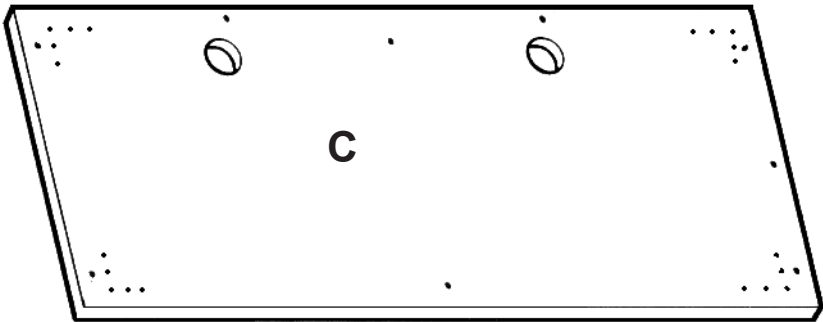

Worksurface	06000301	1 ea.
-------------	----------	-------

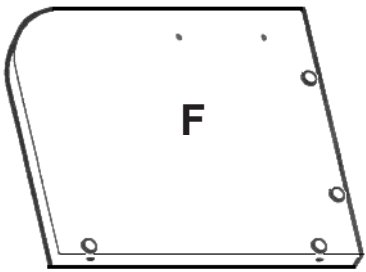

Center Panel	06000341	1 ea.
--------------	----------	-------

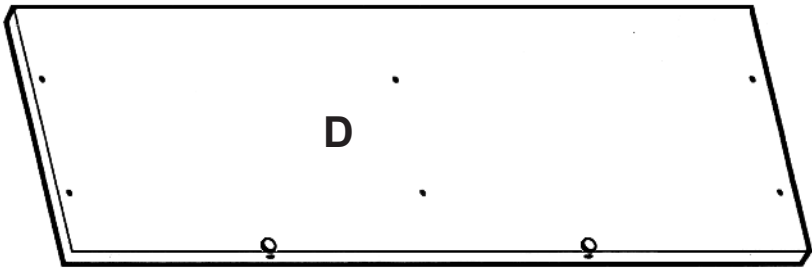


Back	06000352	1 ea.
------	----------	-------



Shelf	06000127	2 ea.
-------	----------	-------


HARDWARE




H1	Leg Bracket	300810	4 ea.
----	-------------	--------	-------



H2	Panhead Screw	901220	24 ea.
----	---------------	--------	--------



H3	Upper Leg	1CCLEG	4 ea.
----	-----------	--------	-------

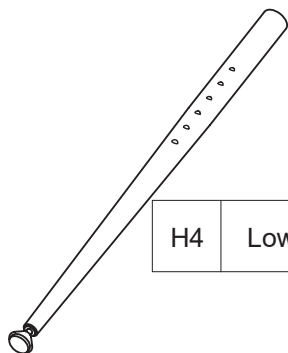

H4	Lower Leg	1CCLEG	4 ea.
----	-----------	--------	-------



H5	Allen Head Screw	1CCLEG	4 ea.
----	------------------	--------	-------



H6	Rafx Cam	909909	8 ea.
----	----------	--------	-------



H7	Flush Rafx Cam	909911	14 ea.
----	----------------	--------	--------



H8	Raifix Bolt - CCB	909925	18 ea.
----	-------------------	--------	--------



H9	Through Bolt	909852	2 ea.
----	--------------	--------	-------




H10	Cord Grommet	H1480	2 ea.
-----	--------------	-------	-------

### Using the Rafx System:



Insert the Rafx Cams into the appropriate holes. The flat edge of the cam should be facing the edge of the panel.

Slide Rafx Cams of the panel to be attached onto the corresponding posts.

When screwing post into hole, **Do Not** over tighten. Screw post down until bottom face of post flange just touches board surface.




Using a #3 Phillips screwdriver, turn the rotating portion of the Rafx Cam a 1/2 turn clockwise to secure. **IMPORTANT!** Do not exceed 1/2 turn when tightening cams. Turn 1/2 turn counterclockwise to disassemble and remove panel.

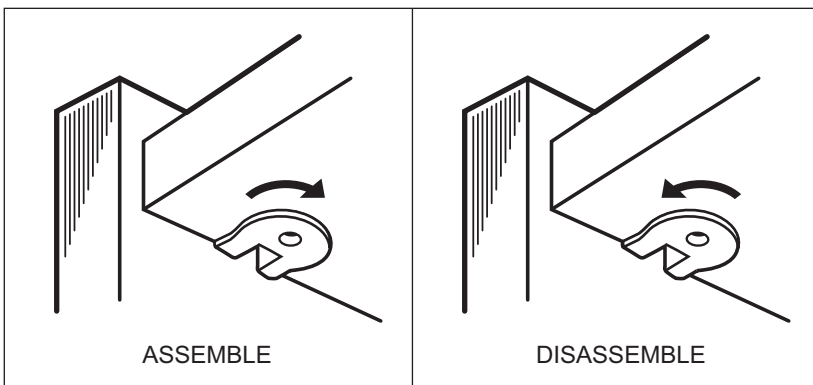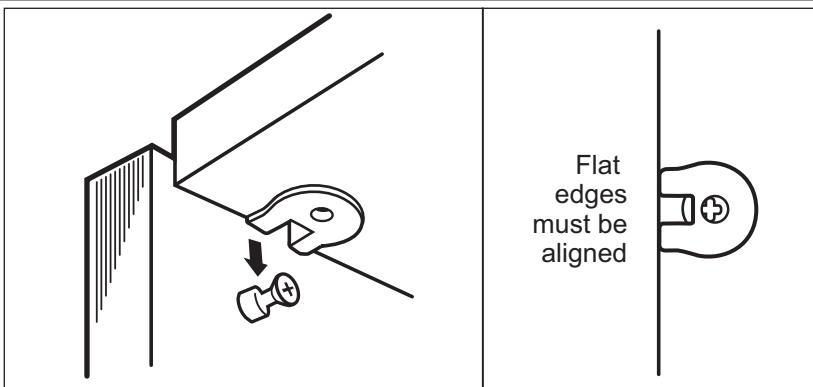


**#1**

Place the Worksurface (C) face down on a clean, carpeted surface with the pre-drilled holes facing up. Install a Leg Bracket (H1) at each corner of the Worksurface using five Panhead Screws (H2) in the pre-drilled holes as shown.

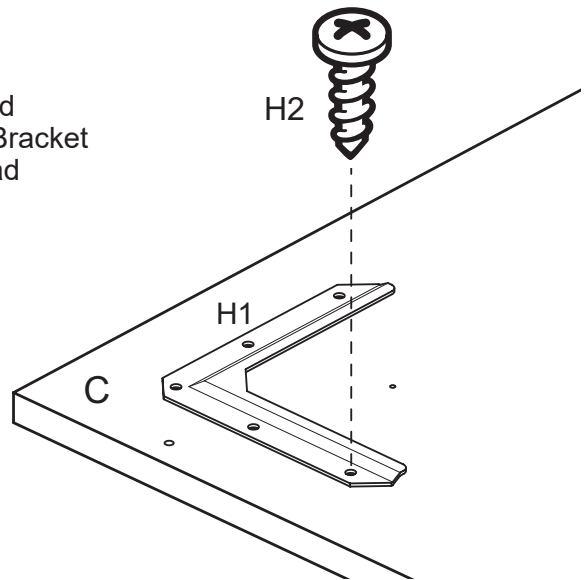

**#2**


Slide an Upper Leg (H3) into each set of Leg Brackets (H1) and secure in place using a Panhead Screw (H2) in the pre-drilled hole as shown.

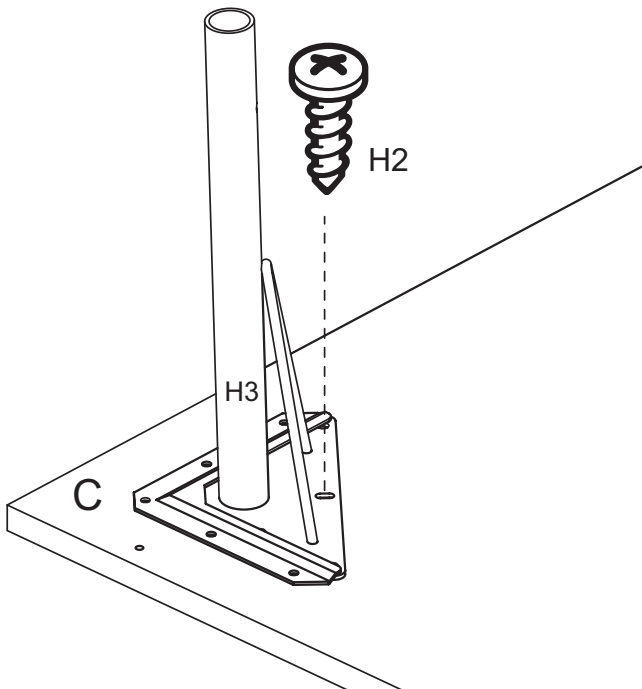

**#3**


Slide a Lower Leg (H4) into each Upper Leg (H3). Select the desired height and secure in place using an Allen Head Set Screw (H5) as shown.

Repeat this step on the remaining legs.

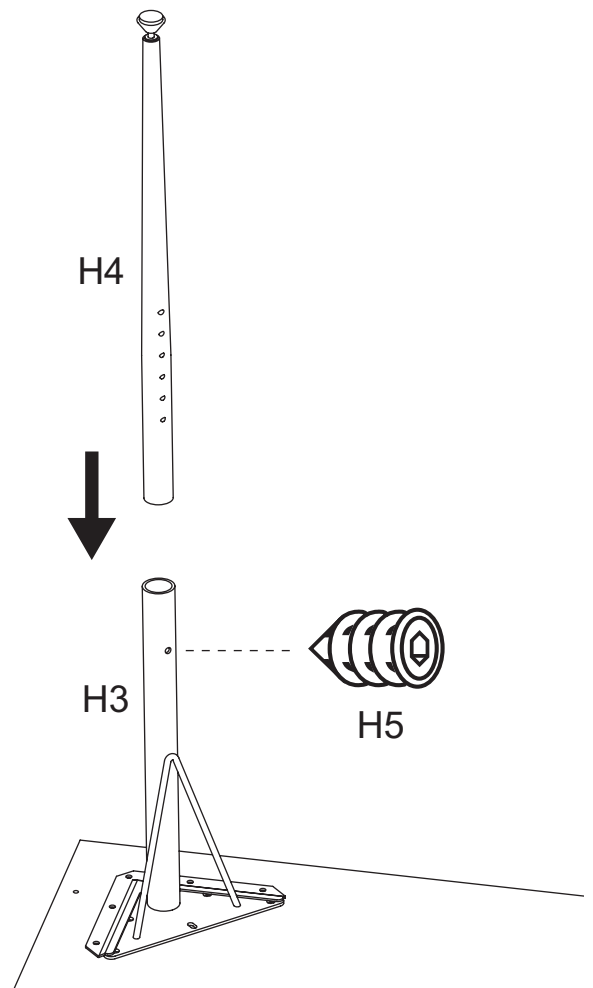


## #4

Place the Left Side (A), Right Side (B), Center Panel (F) and the two Shelves (G) as shown. Insert 12 Flush Rafix Cams (H7) where indicated into sides and center panel (A,B,F) and 8 Rafix cams (H6) into the shelves (G)

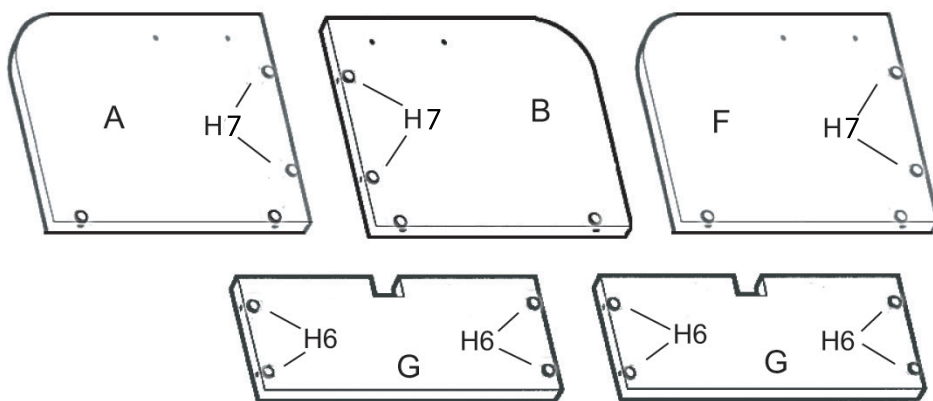


## #5

Screw two rafix Bolts (H8) into the Left Side (A) and Right Side (B) where indicated.

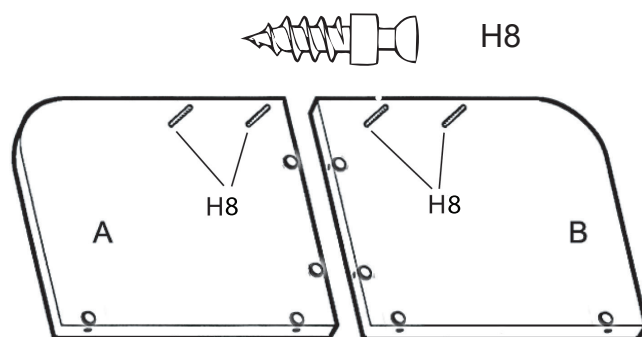


## #6

Insert two through bolts (H9) into the pre-drilled holes on both sides of the Center Panel (F) as shown.

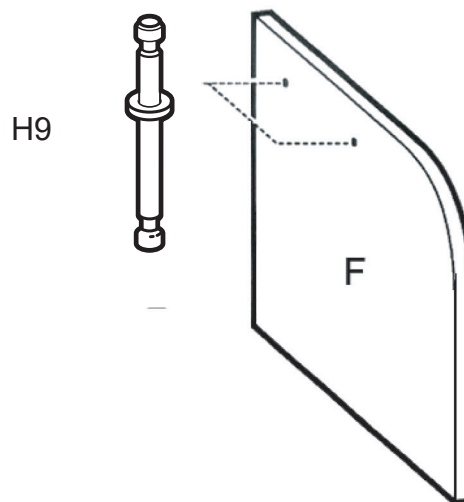


## #7

Screw 6 Rafix Bolts (H8) into the Back (D) where indicated. Insert two flush rafix cams (H7).

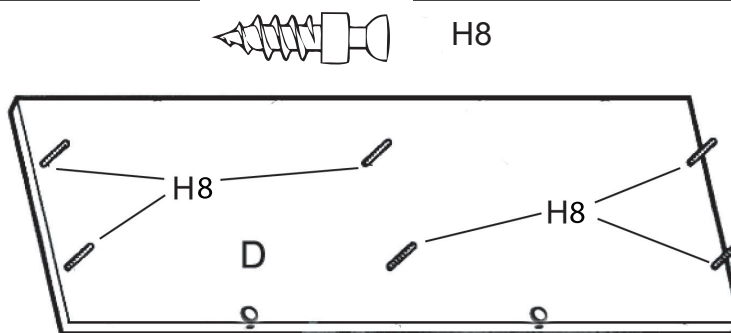


**#8**

Position a Shelf (G) to a Left Side (A) with the cord notch oriented as shown. Secure in place using the cams.

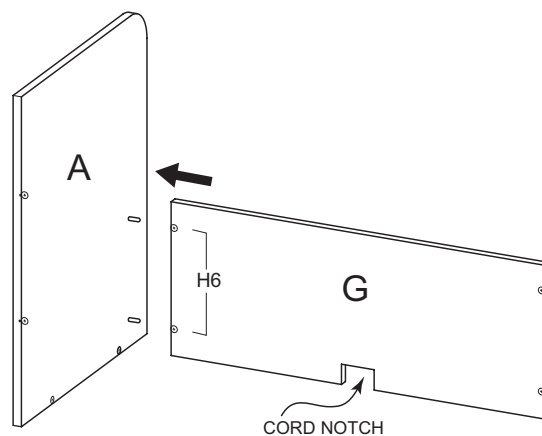

**#9**


Position the other Shelf (G) to the other side of the Center Panel (F) with the cord notch oriented as shown. Secure in place the cams.

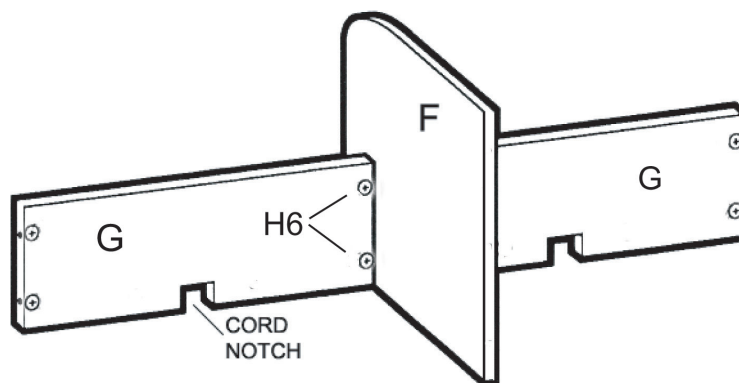

**#10**


Place the Left Side (A) onto the other end of a Shelf (G) as shown. Turn the Cams (H6) of the Shelf to secure.

Place the Right Side (B) onto the other Shelf as shown. Turn the Cams of the Shelf to secure.

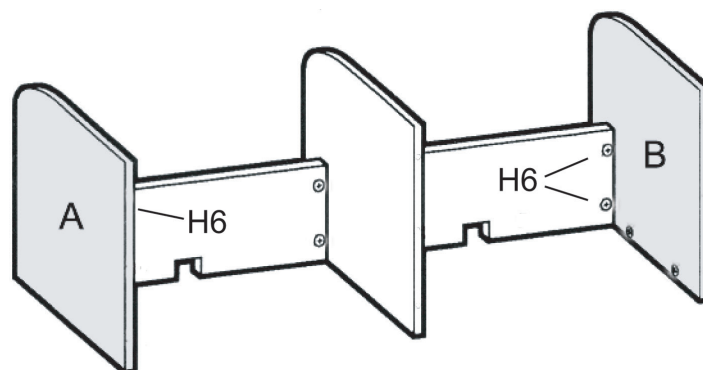


**#11**

With the assistance of another person, turn the assembly upright as shown. Position the Back (D) onto the assembly and turn the six cams to secure.

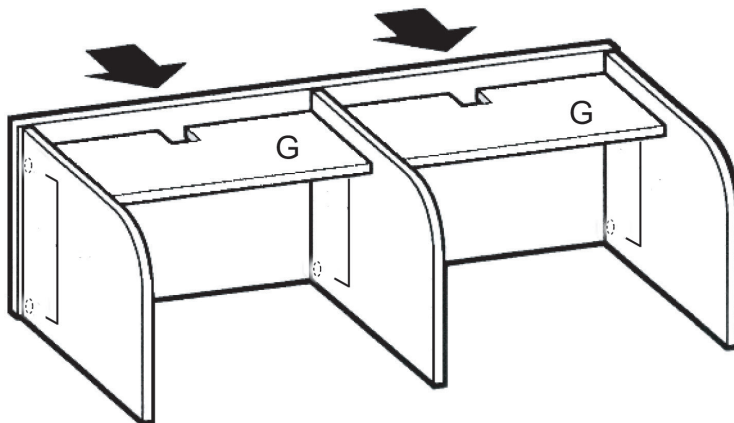


## #12

Place 8 rafix bolts (H8) onto the worksurface (C) as shown.  
With the help of another person, place top assembly onto the bottom worksurface. Secure by turning cams.

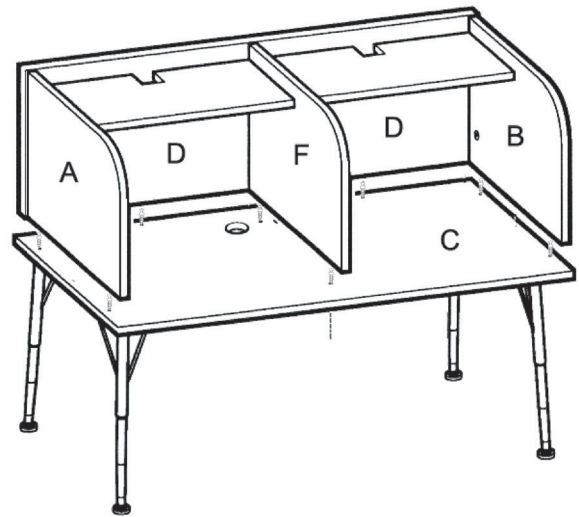

Press two Cord Grommets (H10) into the holes of the Worksurface (C) as shown.

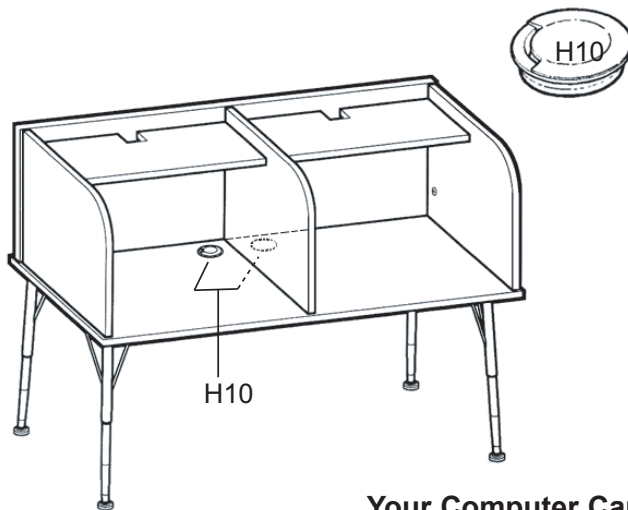

**Your Computer Carrel is now fully assembled and ready for use.**